


Cost of Bid Document Rs.500/- (Non-Refundable)

Ref. GPS/CIVILWORKS-Tender-01/2017/\_\_\_\_\_

# BID DOCUMENT

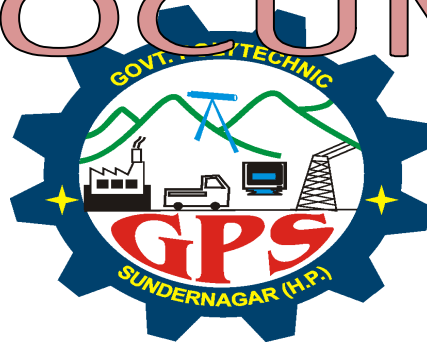

## NAME OF WORK :-

C/O TOILETS (FIRST & SECOND FLOOR) ON THE EXISTING GROUND FLOOR TOILET & TILE FLOORING IN GROUND FLOOR TOILET OF BLOCK-E AT GOVT POLYTECHNIC SUNDERNAGAR (HP)

Estimated Cost:-  
**Rs.6,07,085/-**

Earnest Money:-  
**Rs.20,000/-**

Date & Time of Submission:-  
**20/03/2017 at 11.30 A.M.**

Date & Time of Opening:-  
**20/03/2017 at 5.00 P.M.**

Principal  
Govt. Polytechnic,  
Sundernagar(H.P.)

## Annexure-I

<u>Sr. No.</u>	<u>Particulars of Items</u>	<u>Qty.</u>	<u>Unit</u>	<u>Through rate in Figure</u>	<u>Through rate in Words</u>
----------------	-----------------------------	-------------	-------------	-------------------------------	------------------------------

	<b>Demolition</b>				
1	Demolition above G.L.upto floor two level including disposal of unserviceable materials within 20 metres	0.11	Cum		
2	Dismantling tiled floors laid including stacking ofserviceable materials and disposal of un-serviceable materials within 20 metres lead (wooden/concrete joists to be measured and paid for separately)	4.05	sqm		
	<b>Brick Work:-</b>				
3	Half brick thick honey brick work with common burnt clay building bricks in cement mortar 1:4 (1 cement : 4 sand)secondt class bricks	19.32	Cum		
4	Stone work on plain Ashlar Cyclopean in superstructure upto floor two level including pointing with cement mortar 1:2 (1 cement :2 sand) in:-	0.00	Cum		
5	Using 2nd class common brunt brick in cement mortor 1:5 ( 1Cement:5 sand)	1.84	Cum		
6	Providing form work with steel plates 3.15mm, thick welded with angle iron in frame 30x30x5mm . so as to give a fair finish including centering, shuttering ,structting and propping etc. with wooden batten and ballies, height of propping and centering below supporting floor to ceiling not exceeding 4 mtrs. and removal of the same for insitu-reinforcement concrete & plain concrete work in :	4.26	sqm		
7	Providing and laying Cement concrete work 1:2:4(1 Cement :2 Sand:4 graded stone aggregate 20mm nominal size) and curing complete excluding cost of form work and reinforcement concrete work in:	0.82	cum		
8	Providing Tor steel reinforcement for R.C.C. work including bending, binding and placing in position complete upto floor two level.	17.17	kg		
	<b>Wood Work:-</b>				
9	Providing Wood work in frames of doors , Windows , Clerestory , windows & other frames wourght framed & fixed in position . In Sal wood	0.07	Cum		
10	Providing and fixing panelled glazed or panelled and glazed shutters for doors windows and clerestory windows, including black enamelled iron butt hinges with necessary screw. 2nd Class Deodar wood	4.62	sqm		
11	WIRE GAUGE SHUTTER: Providing and fixing wire gauge shuttering using galvanised M.S wire gauge of I.S gauge desiugned as G.with eire of dai 0.56 mm for doors windows and clerestorey windows including bright finsihed balck enamelled iron hinges with necessary screws. 40 mm Th. 2nd Class Deodar Wood 35mm th.	21.28	Sqm		
12	Providing and fixing M.S. grills of required pattern in wooden frames of windows etc. with M.S. Flats, Square or round bars wirth round headed bolts and nuts or by screw. Plain grill	23.66	Kg		
13	Providing and fixing anodized aluminium sliding door bolt anodized colour and shade with bolts and nuts screws etc. complete.				
	300x16 mm	0.00	No		
14	Providing and fixing aluminium tower bolts(berrel type) anodized trans parent or dyed to required shade and colour with screws etc.complete)				
	150x10mm				
	100 x 10 mm	16.00	No		
15	Providing and fixing aluminium handles anodized transparent or dyed to required colour of shade with necessary screws etc. complete.				
	125mm	8.00	No		

16	Providing 40 x 3mm flat iron hold fast 40cm. Long including fixing to frame with 10mm diameter bolts nuts and wooden plugs and embedding in cement concrete block. 30X10X15cm 1:3:6 (1 Cement, 3 Sand,6:Graded Stone aggregate 20mm nominal size)	16	no		
17	White glazed tiles 6 mm thick in skirting risers of steps and dado 12 mm tjick cement mortar 1:3 (1 cement: 3 sand ) and jointed with cement slurry	20.16	sqm		
18	White glazed tiles 6 mm thick in skirting risers of steps and dado 12 mm tjick cement mortar 1:3 (1 cement: 3 sand ) and jointed with cement slurry	20.16	sqm		
19	15mm Cement plaster in Single coats on <b>fair side</b> of brick /concrete / stone walls for interior plastering up floor level two including arrises . internal rounded angles ,chamfer & /or rounded angles not exceeding 80 mm in girth & finished even & smooth . in cement mortar 1:6	8.36	sqm		
20	20 mm Cement plaster in Single coats on <b>Rough side</b> of brick / stone walls for interior plastering up floor level two including arrises . internal rounded angles ,chamfer & /or rounded angles not exceeding 80 mm in girth & finished even & smooth . in cement mortar1:5	8.36	sqm		
21	6 mm cement plaster to ceiling in Cement Mortor 1:3 (1:Cement, 3 Sand)	4.26	sqm		
	Distemping (two coats) with oil bound washable distemper of approved brand and manufacture and of required shade on undecorated Ceilling / Slopy surfaces to give an even shade over and incuding a priming coat with distemper priming of approved brand and manufacture after thoroughly brushing the surface free from mortar droppings and other foreign matter and also including preparing the surface even and sand papered smooth priming coat with distemper primer.	78.08	per m		
22	Finishing wall with water proofing cement paint of approved brand and & manufacture and of reuired shade as undecorated wall surfaces (two coats) to give an ever shade after throughly brushing the surface to remove all dirt and remains of loose powdered materials	8.36	sqm		
23	Dismantling old C.I. Pipes including excavaton and refilling trenches after taking out the pipes,breaking lead caulked joints, melting of lead and making into blocks including stacking of pipes & lead at site within 20 metreslead.				
	125mm dia Metre	8.00	R mts		
24	Dismantling old C.I. Pipes including excavaton and refilling trenches after taking out the pipes,breaking lead caulked joints, melting of lead and making into blocks including stacking of pipes & lead at site within 20 metreslead.	8.00	Sqm		
	TOTAL ITEMS 1 TO 24				

**SIGNATURE**  
**(Contractor)**

**ADDRESS OF CONTRACTOR:**

## **TERMS AND CONDITIONS:**

1. Sealed limited Tenders tender are hereby invited by Principal Govt. Polytechnic, Sunder Nagar (Himachal Pradesh) for the **C/O TOILETS ( FIRST AND SECOND FLOOR) ON THE EXISTING GROUND FLOOR TOILET& TILE FLOORING IN G.F. TOILET OF BLOCK E AT GOVT POLYTECHNIC SUNDERNAGAR ( HP). Estimated cost of Works is Rs. 607085/-**
2. Bid documents consisting of complete specification, the schedule of quantities of the various classes of work to be done, and the set of conditions of contract to be complied with by the person whose tenders may be accepted, which will also be found printed in the form of tenders, can he seen/purchased at the Principal office between the office hours of 10 AM to 5 PM every day, except on Sunday and Public holidays upto 20/03/2017 at 11.30 AM.

3. The Bidder should be registered with HPPWD/IPH/HIMUDA or any other deptt. as approved by H.P. Govt. Copy of same should be attached along with Bid document as proof.
4. The site for the work is available.
5. Tender which should always be placed in sealed covers, with the name of the work written on the envelope will be received by the Principal office up to 11:30A.M. on dated 20/03/2017 and will be opened in his office on the same day at 3:00 PM.
6. Bid document can be obtained from the office of Principal, Govt. Polytechnic Sundernagar on payment of non refundable fee of Rs.500/- in cash or Rs 550/ by Post. The time allowed for the carrying out of the work will be intimated in work order.
7. The contractor should quote in figure as well as in words the rate, and amount tendered by them. The amount for each item should be worked out and the requisite total given.
8. Earnest money amounting to **Rs. 20,000/- ( Twenty thousand Only) in shape of Demand draft duly pledged in favor Principal, Govt. Polytechnic Sundernagar** should accompany each tender in a sealed cover subscribed tender for above work and addressed to the Principal Govt. Polytechnic Sundernagar. The tenders received without earnest money shall be rejected. The EMD of the unsuccessful bidders will be returned within one month of opening and finalization of tender.
9. The acceptance of a tender will rest with the Principal who does not bind himself to accept the lowest tender & reserves himself the authority to reject any or all of the tenders received without the assignment of a reason. All tenders in whom any of the prescribed conditions are not fulfilled or are incomplete in any respect are liable to be rejected.
10. The successful bidder on award of contract will have to deposit performance security amounting upto 5% of the Contract value in the shape of FDR/Bank Guarantee to be pledged in favour of Principal Govt Polytechnic Sundernagar which will be returned to the bidder after six months of satisfactory performance of works.
11. Canvassing in connection with tenders is strictly prohibited and the tenders submitted by the contractors who resort to canvassing are liable to be rejection.
12. All rates shall be quoted on the proper form of the tender alone.
13. Special care should be taken to write the rates/amount in figures as well as in words, and the amounts in figures only in such a way that interpolation is not possible; the total amount should be written both in figures and in words. In case of figures the word 'Rs' should be written before the figure of rupees.
14. Sale Tax or any other tax on material in respect of this contract shall be payable by the contractor and Institute will not enter in any claims whatsoever in the respect.
15. The contractor must produce Income Tax Clearance Certificate before the tender can be sold to him.
16. The material used should be branded and of good quality.
17. Quantities may be increased or decreased as per actual requirement.
18. The contractor should have executed similar kind of works since last 2 years and should have annual turnover of Rs. 50.00 Lac since last two years. Audited balance sheets of last 2 years should be attached with this tender document as a proof.

Read and Accepted

**Signature of the tenderer**

**Principal  
Govt. Polytechnic  
Sunder Nagar (H.P.)**